



Features:



FLOOR TILES



DECTICIES



RESISTANT TO



ANTISLIP



HIGHLY UV RESISTANT



RESISTANT TO SCRATCHES



EASY TO CLEAN



FROST RESISTANCE



RANDOM TILES



RESISTANCE TO HIGH TEMPERATURES



HEAVY LOAD BEARING



HIGH MECHANICAL RESISTANCE




SKIDOO THE WORLD OF GERAMIC

400 x 400 MM

HAEVY DUTY VITRIFIED TILES

AND LINE



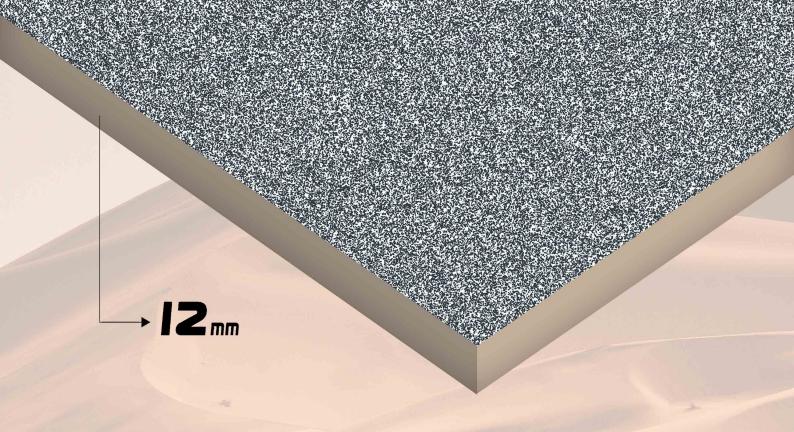

One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

Skidoo Heavy Duty vitrified tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are safely used in pedestrian traffic area, vehicular movement area, terraces, balconies, roof sunbathing areas, veranda, seaside, beach, swimming pools, side walk, metros, airports, train stations, industrial buildings, parking lots, underpasses, villa gardens, distribution companies, call centers, educational buildings etc...

Application Areas:



PATHS AND



SWIMMING POOLS AND



TERRACE



PARKING AREAS, TRANSITABLE AREAS



BEACH ESTABLISHMENTS



PUBLIC PARK



STREET FURNISHINGS





INDUSTRIAL AREA













ROCK 52002

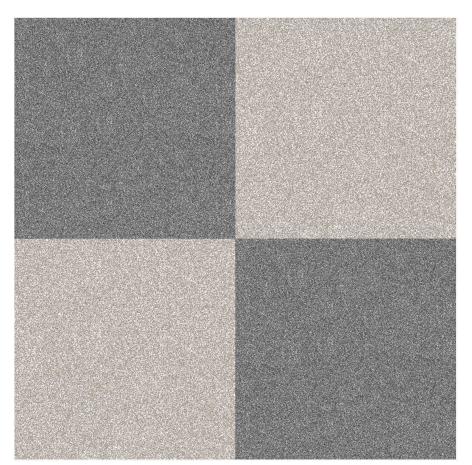



















ROCK 52002

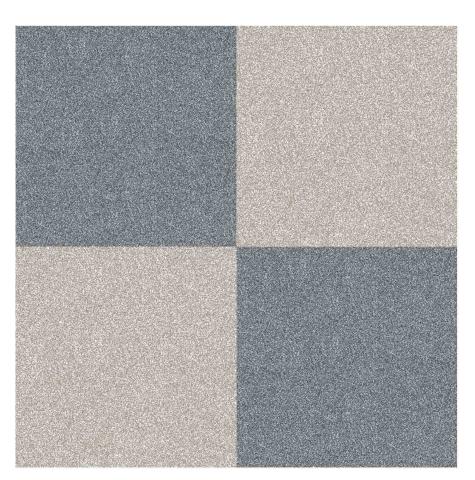















ROCK 52004



ROCK 52005

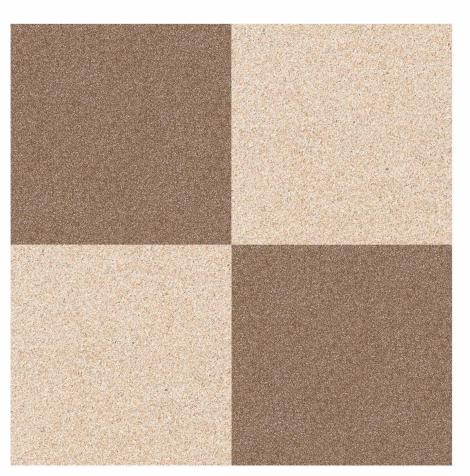









ROCK 52006



ROCK 52005




















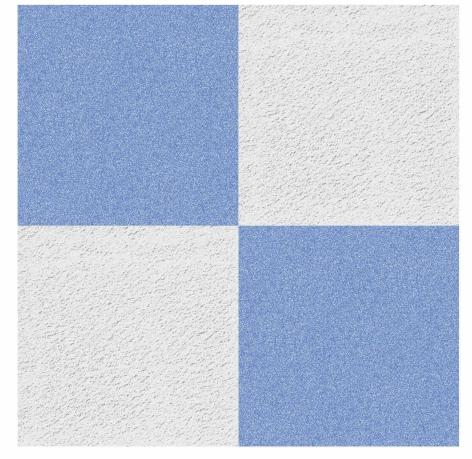

ROCK 52008



















ROCK 52008

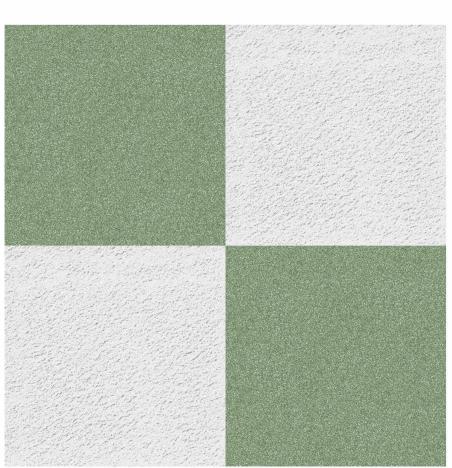








52010-D



52010-L

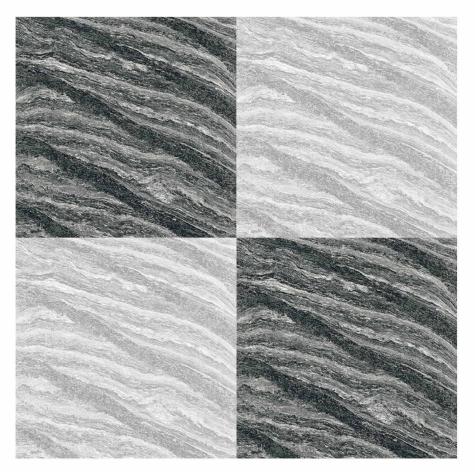







52011-D



52011-L










52012-D



52012-L

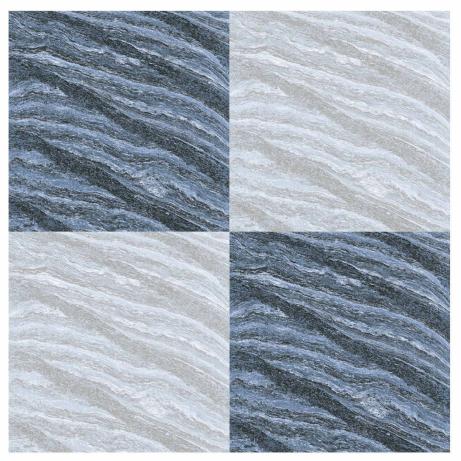












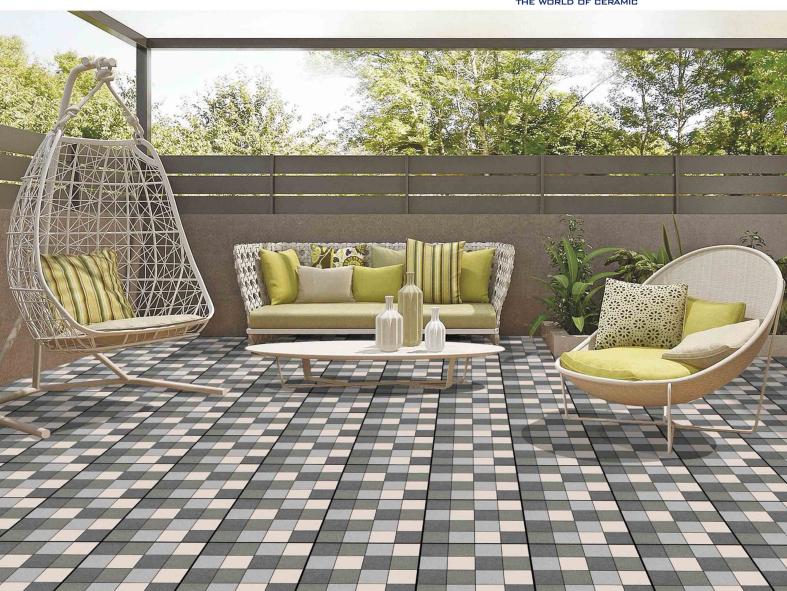



52013

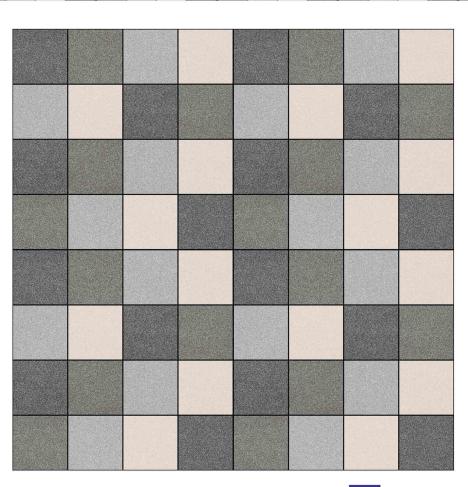















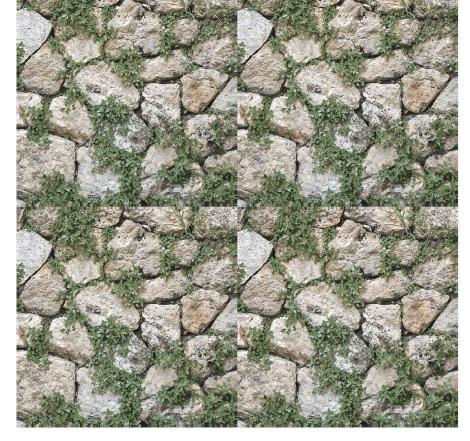


52014








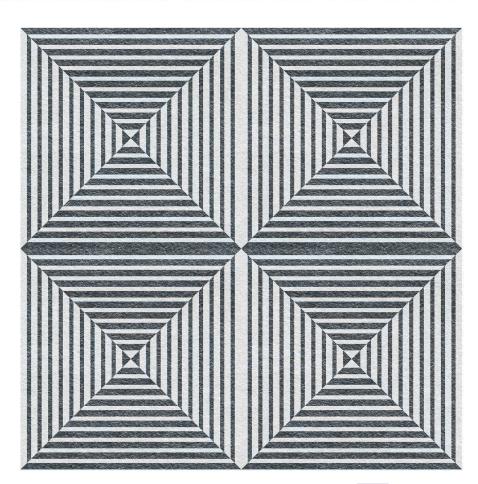








52017

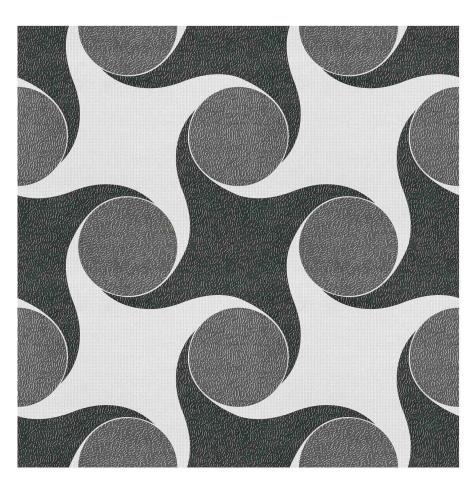

















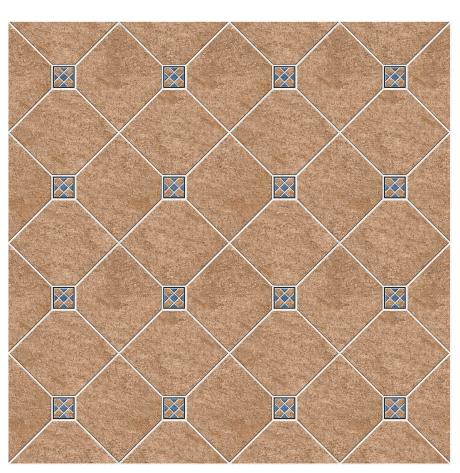
















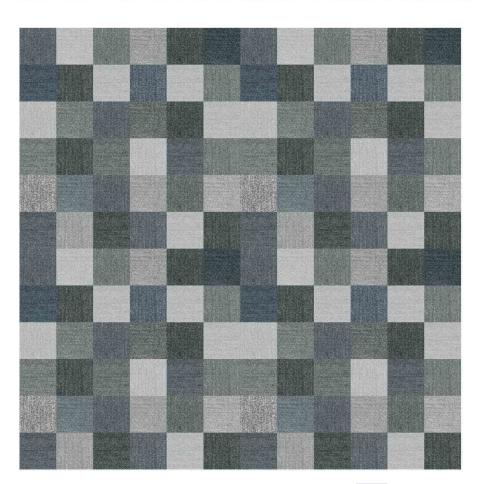






























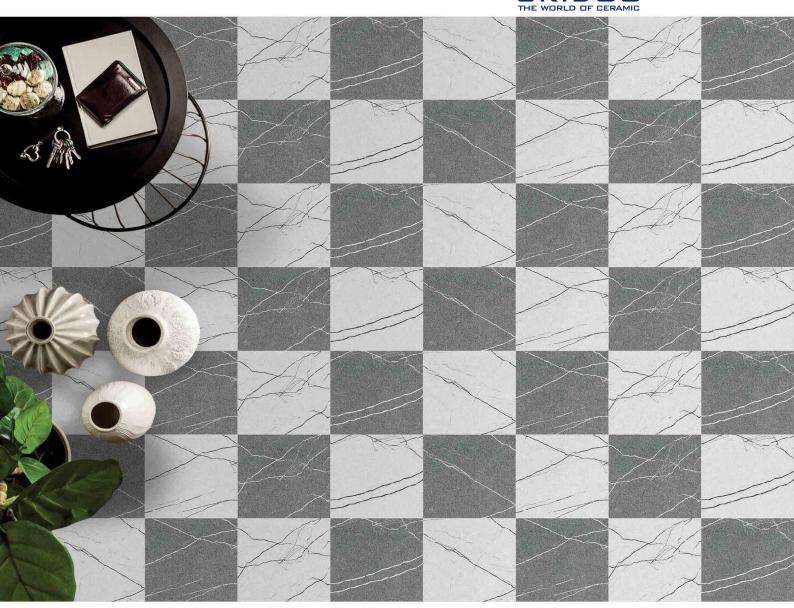



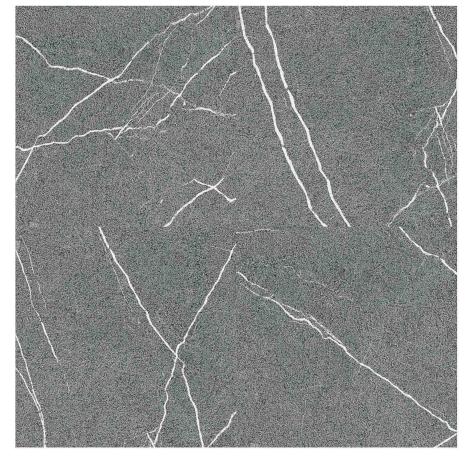


















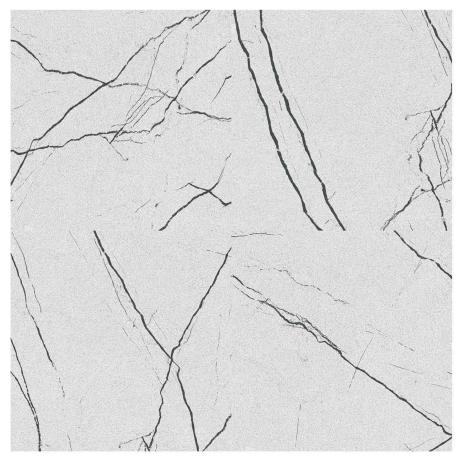
































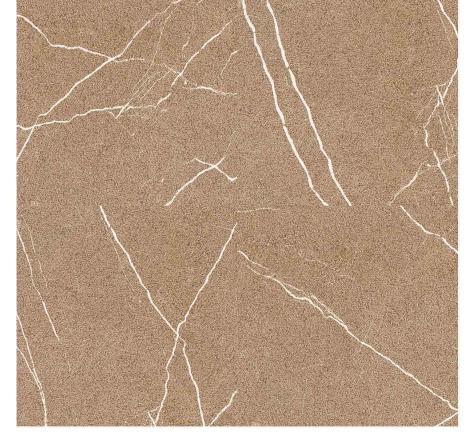














































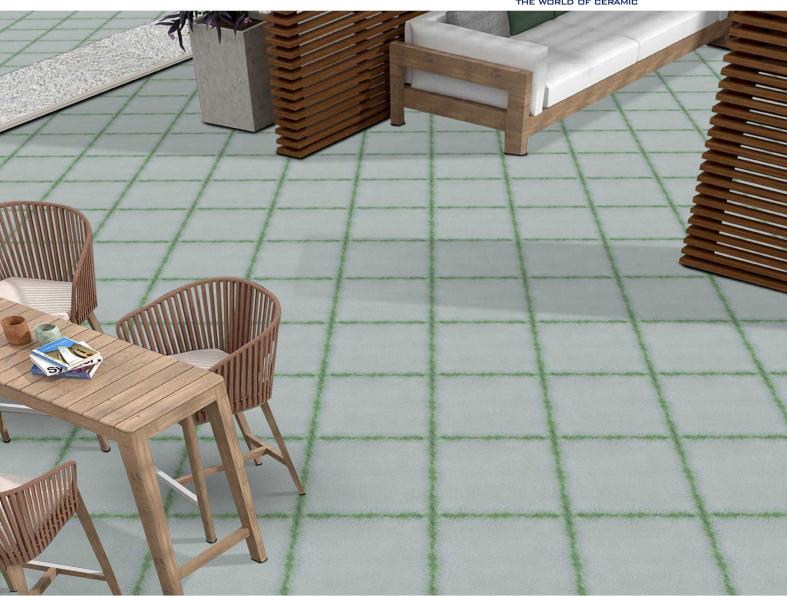



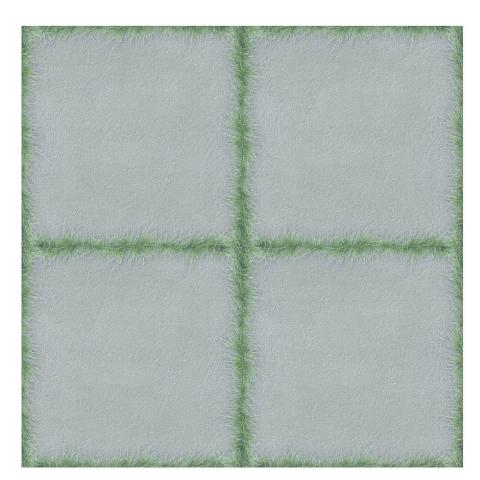
















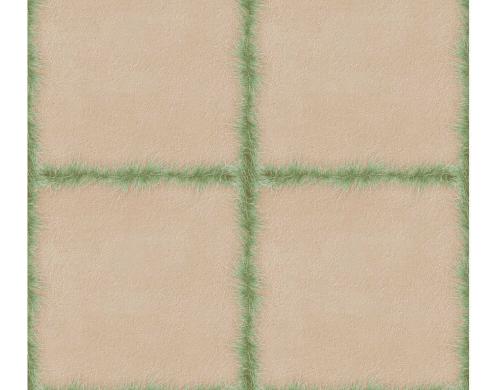















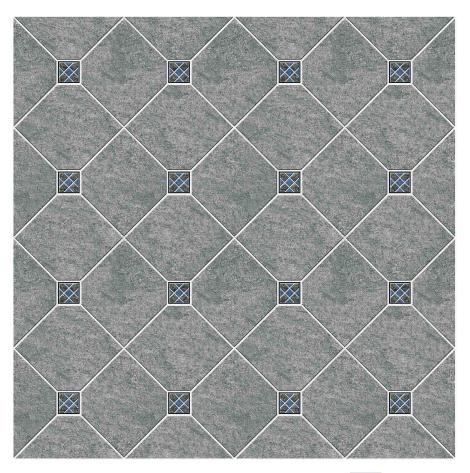








































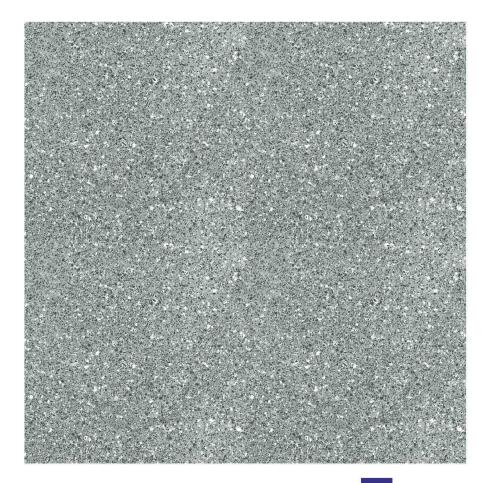



Technical Specification

Sr. No.	Property	VALUE	
1	Deviation in Length	<u>+</u> 0.5 %	
2	Deviation in Thickness	<u>+</u> 3 %	
3	Straightness of Sides	<u>+</u> 0.5 %	
4	Rectangularity	<u>+</u> 0.4 %	
5	Surface flatness	<u>+</u> 0.2 %	
6	Water absorption*	< 5 %	
7	Chemical Resistance	Resistance to all alkalies	
		(Except Hydro flouric acid	
		and its compounds)	
8	Thermal Shock	4 Cycles	

Size	Thickness	No. of Tiles/Box	Coverage Area (Approx)	Weight of Box (App.)
400x400mm	11.5mm(App.)	5 Pcs.	0.80 sq. mt.	18.500 Kgs.



Sl Survey No. 45, 8-A National Highway, Morbi-363642, (Guj.) India.

Email: specto.export@gmail.com Web: www.skidooceramic.com Mo. No: +91 99789 66119