



Granite is one of the most durable and attractive of all natural stones. It is quarried in many countries across the World and consists of quartz, feldspar and mica; during formation it cooled very slowly which results in it being second only to diamonds in its hardness.



## Features: FLOOR TILES RESISTANT TO STAINS HIGHLY UV RESISTANT RESISTANT TO SCRATCHES SKIDOO THE WORLD OF GERAMIC

R



HEAVY LOAD BEARING

HIGH MECHANICAL RESISTANCE



One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

Skidoo Heavy Duty vitrified tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are safely used in pedestrian traffic area, vehicular movement area, terraces, balconies, roof sunbathing areas, veranda, seaside, beach, swimming pools, side walk, metros, airports, train stations, industrial buildings, parking lots, underpasses, villa gardens, distribution companies, call centers, educational buildings etc...

## Application Areas:









PARKING AREAS, TRANSITABLE AREAS

















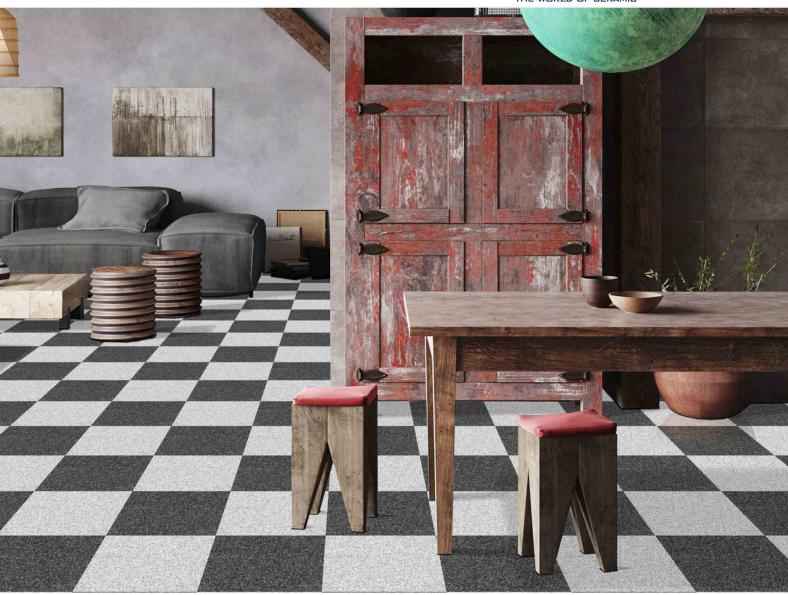






50082

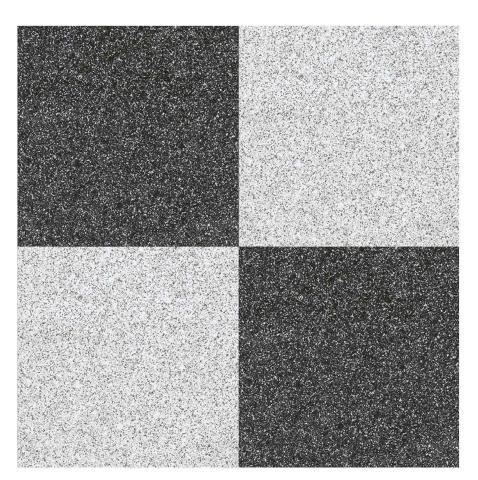












50082

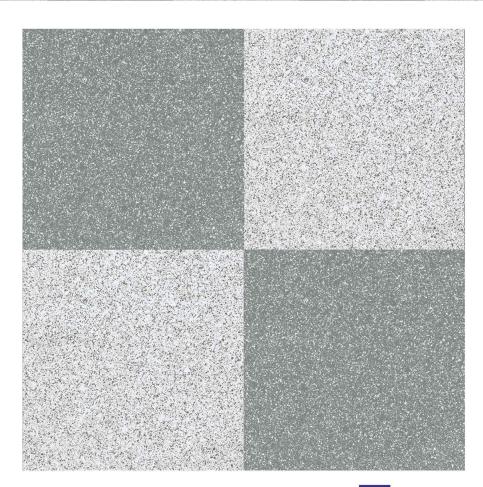




















50082






















50082





















50082



















50097















































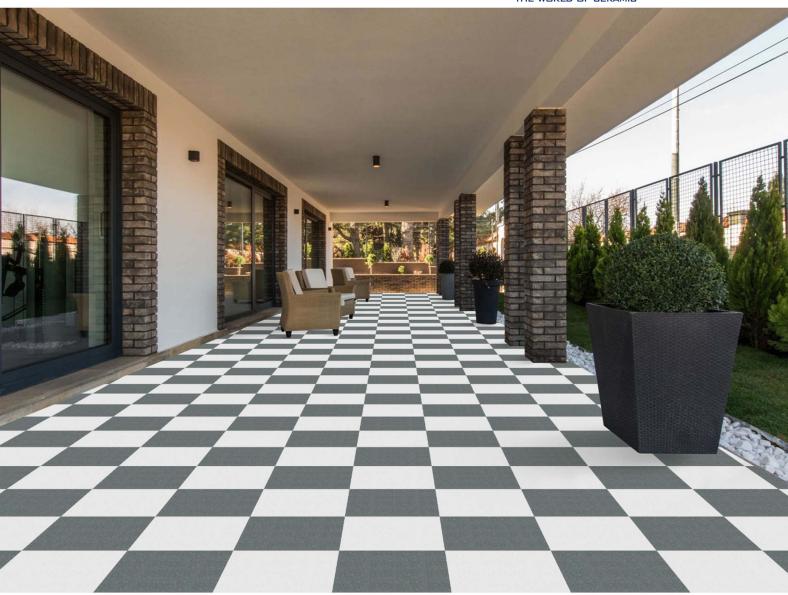



50127

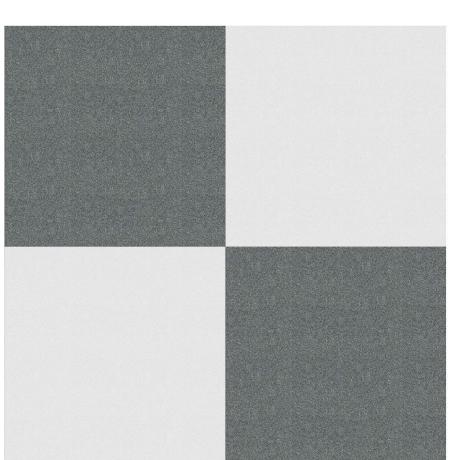

50128







50165



50167









50167


















50170











50169



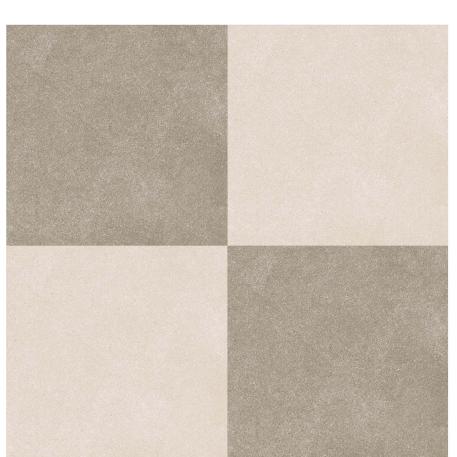


50170









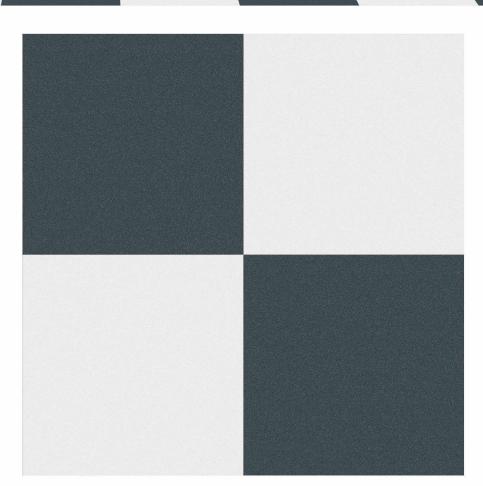



















50192

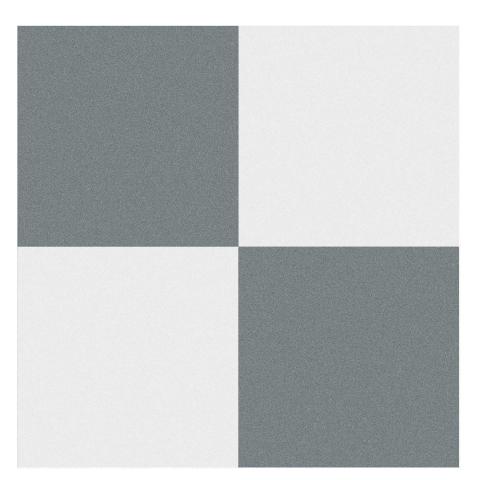


50193









50194

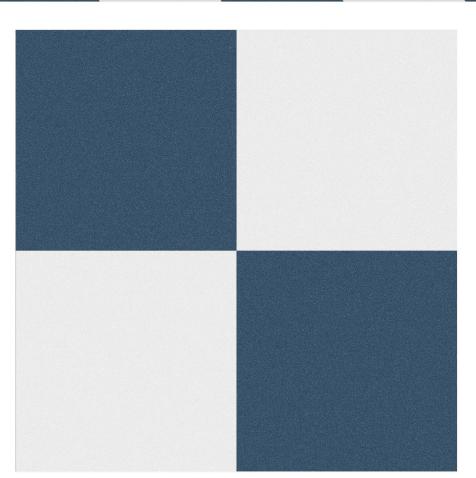


50193



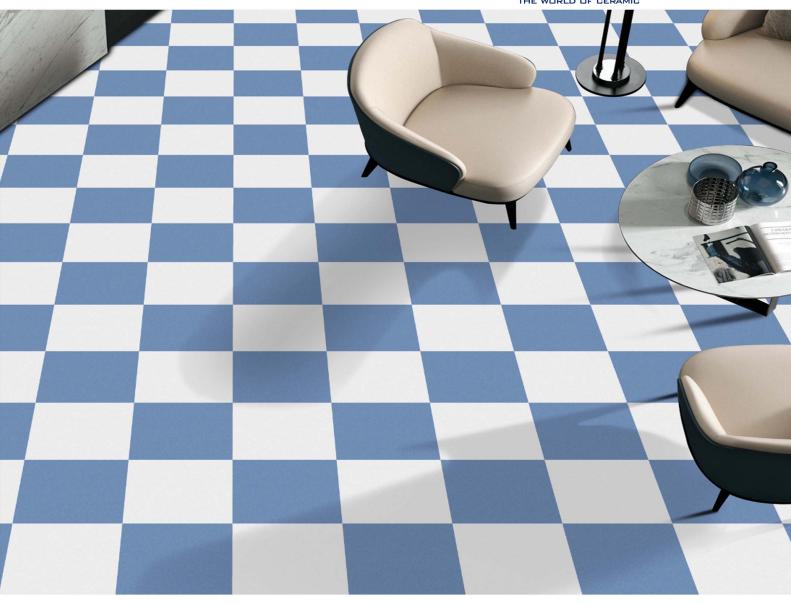





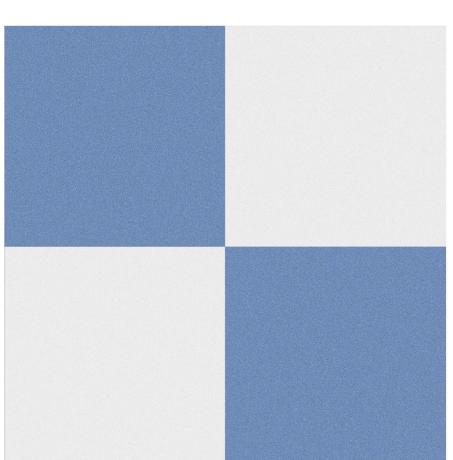

50193
















50196

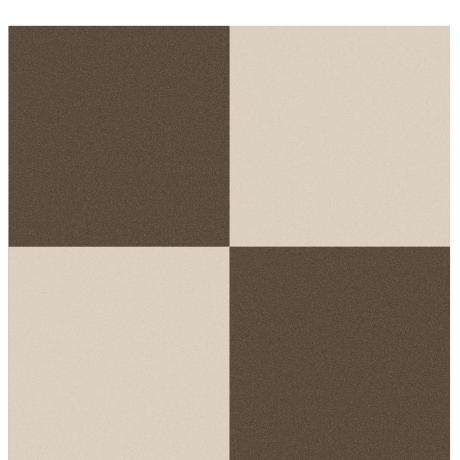

50199














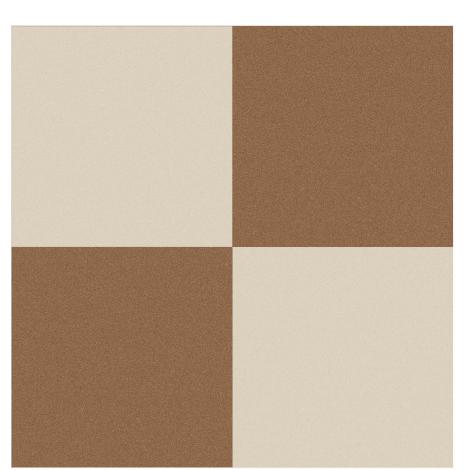























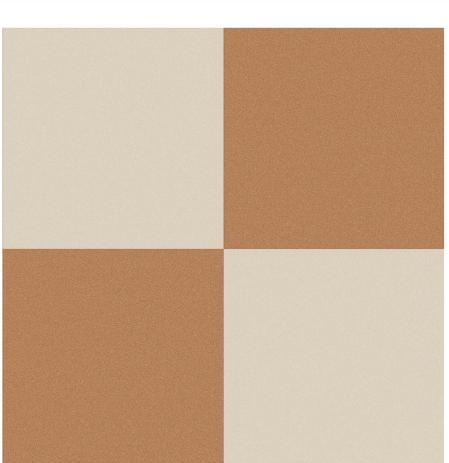

50199

















50203

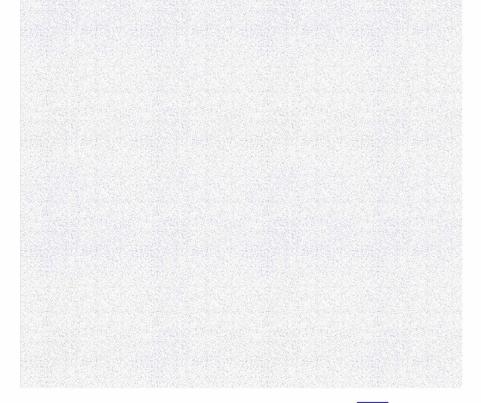













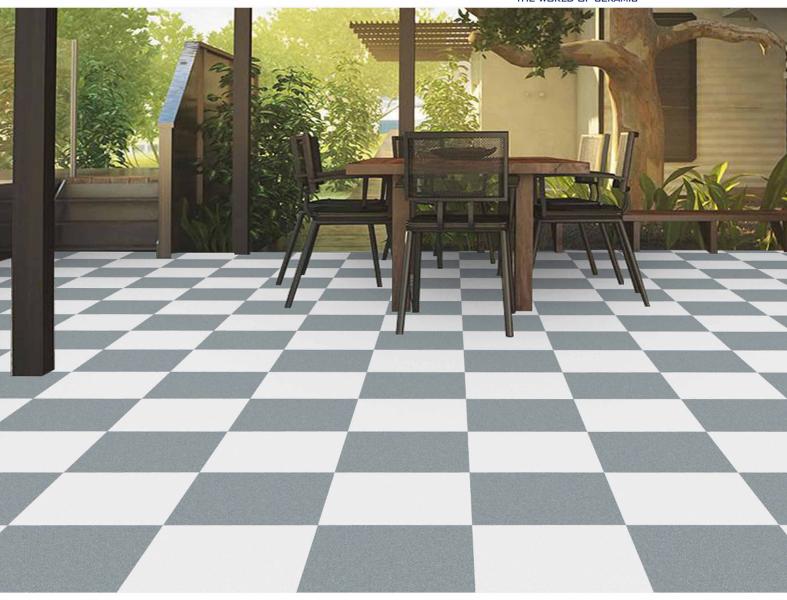



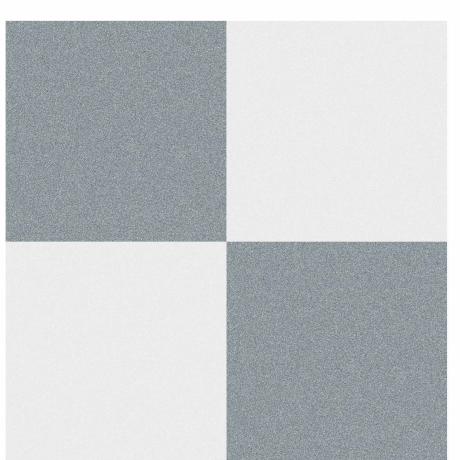





















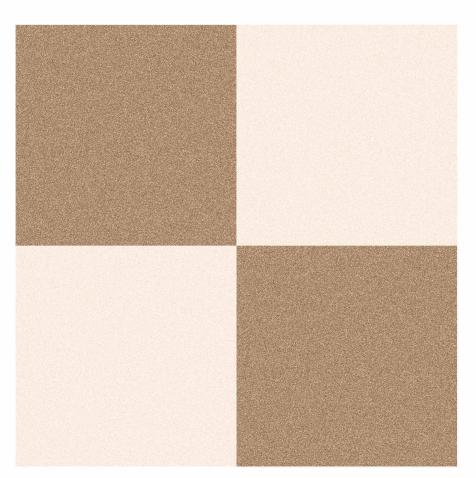

50216









## **Technical Specification**

Sr. No.	Property	VALUE	
1	Deviation in Length	<u>+</u> 0.5 %	
2	Deviation in Thickness	<u>+</u> 3 %	
3	Straightness of Sides	<u>+</u> 0.5 %	
4	Rectangularity	<u>+</u> 0.4 %	
5	Surface flatness	<u>+</u> 0.2 %	
6	Water absorption*	< 5 %	
7	Chemical Resistance	Resistance to all alkalies	
		(Except Hydro flouric acid	
		and its compounds)	
8	Thermal Shock	4 Cycles	

Size	Thickness	No. of Tiles/Box	Coverage Area (Approx)	Weight of Box (App.)
400x400mm	11.5mm(App.)	5 Pcs.	0.80 sq. mt.	18.500 Kgs.



Sl Survey No. 45, 8-A National Highway, Morbi-363642, (Guj.) India.

Email: specto.export@gmail.com Web: www.skidooceramic.com Mo. No: +91 99789 66119