

LIGHT & DARK

SERIES

Come in and Get Artistic

400 x 400 m m
HEAVY DUTY PARKING TILES



When compared to
Light coloured tiles,
Dark coloured tiles
absorb more light.
As a result,
dark tiles can give
the imspression
that the room is
smaller and darker.



Features:



FLOOR TILES



DECTIFIE



RESISTANT TO STAINS



ANTISLL



HIGHLY UV RESISTANT



RESISTANT TO SCRATCHES



EASY TO CLEAN



FROST RESISTANCE



RANDOM TILES



RESISTANCE TO HIGH TEMPERATURES



HEAVY LOAD BEARING



HIGH MECHANICAL RESISTANCE



400 x 400 MM

HAEVY DUTY VITRIFIED TILES





One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

Skidoo Heavy Duty vitrified tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are safely used in pedestrian traffic area, vehicular movement area, terraces, balconies, roof sunbathing areas, veranda, seaside, beach, swimming pools, side walk, metros, airports, train stations, industrial buildings, parking lots, underpasses, villa gardens, distribution companies, call centers, educational buildings etc...

Application Areas:



PATHS AND



SWIMMING POOLS AN



TEDDACES



PARKING AREAS, TRANSITABLE AREAS



BEACH ESTABLISHMENTS



PUBLIC PARKS



STREET FURNISHINGS



INDUSTRIAL AREAS










50001-D



50001-L

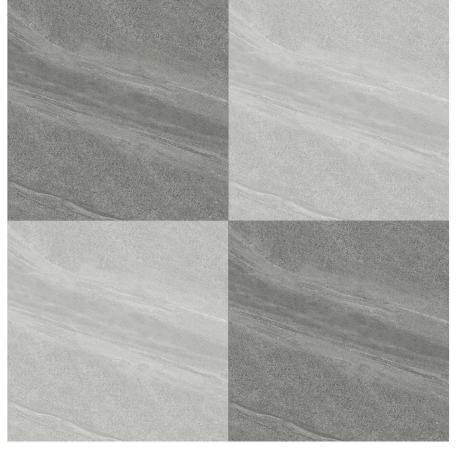















50002-D



50002-L














50011



50012































50014-D



50014-L























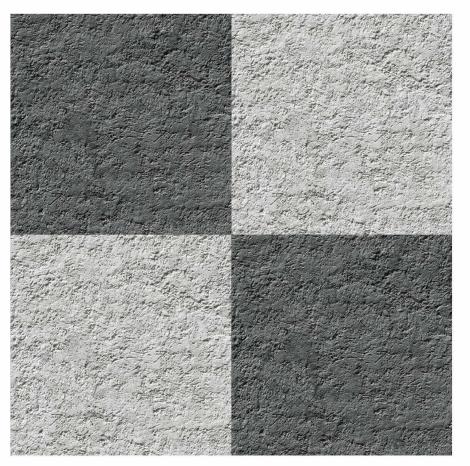




























































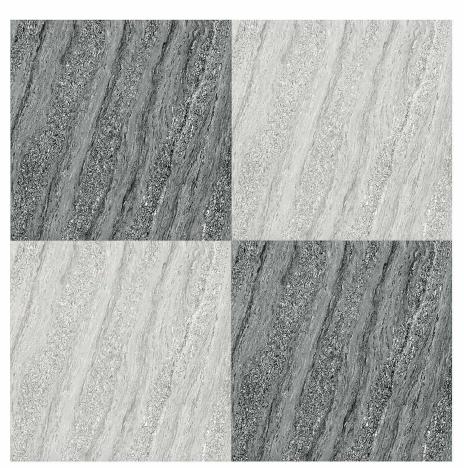




















50067









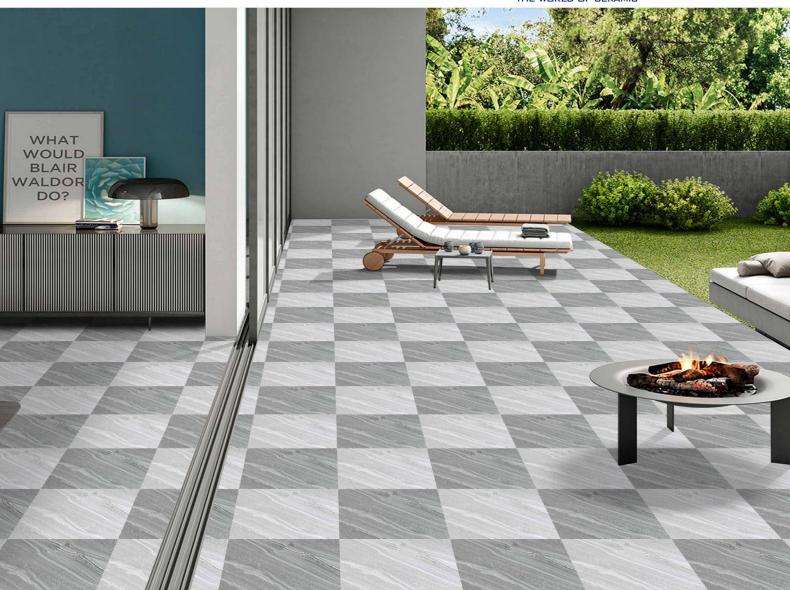




50068



50069

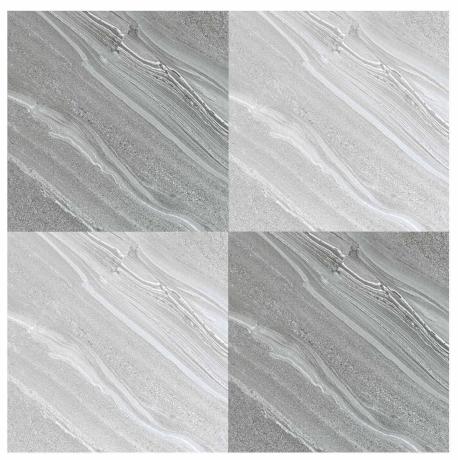















50070



50073















50071-D



50071-L
















50072-D



50072-L












50077



50078

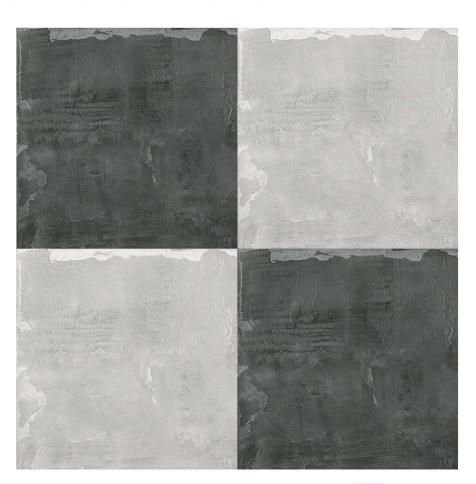







50079



50080



















50091-D



50091-L

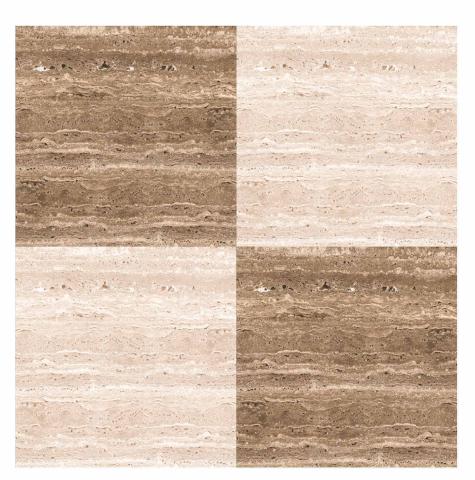
















50092-D



50092-L

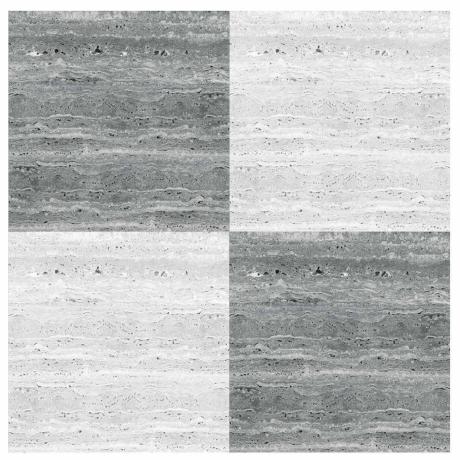













50093



50094
















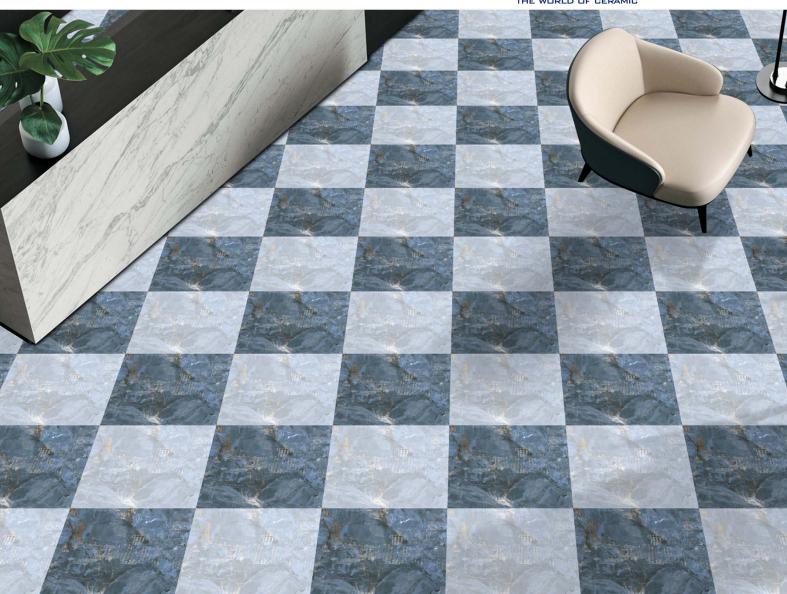





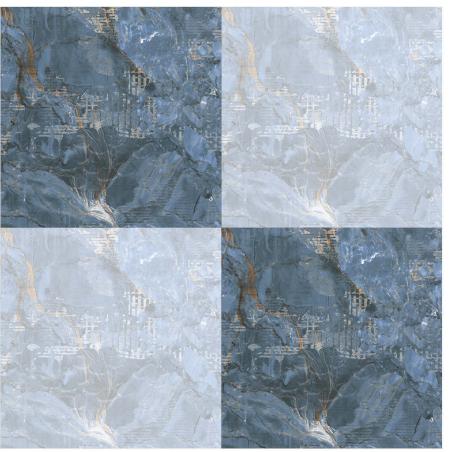


















50099-D



50099-L





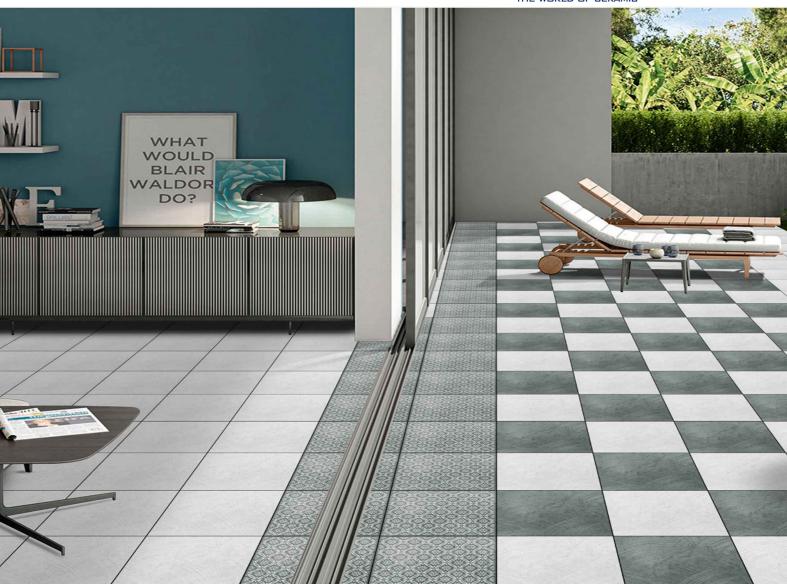




50175




50175-HL



50176

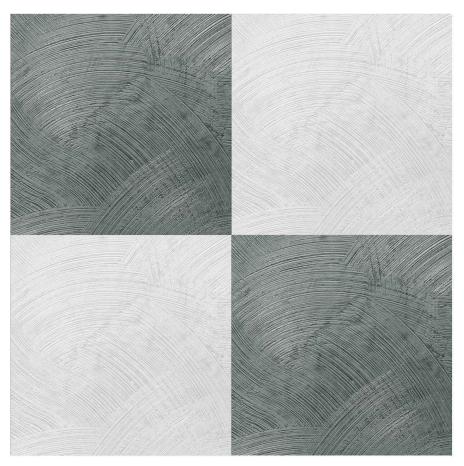





















50119



















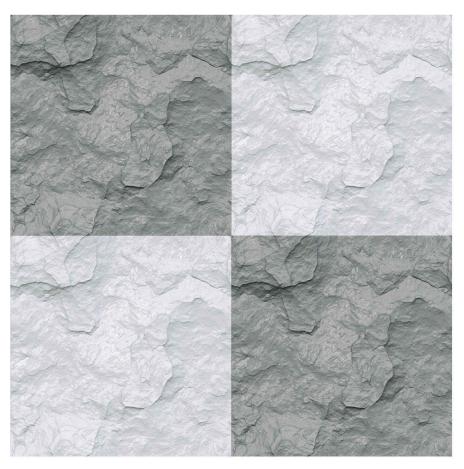







































































50131



50132




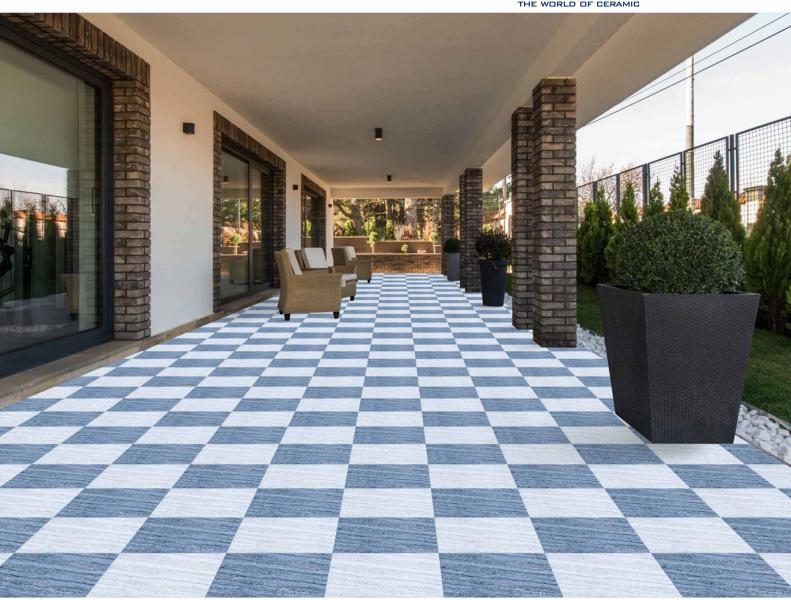






















50136



50137















50138



50139












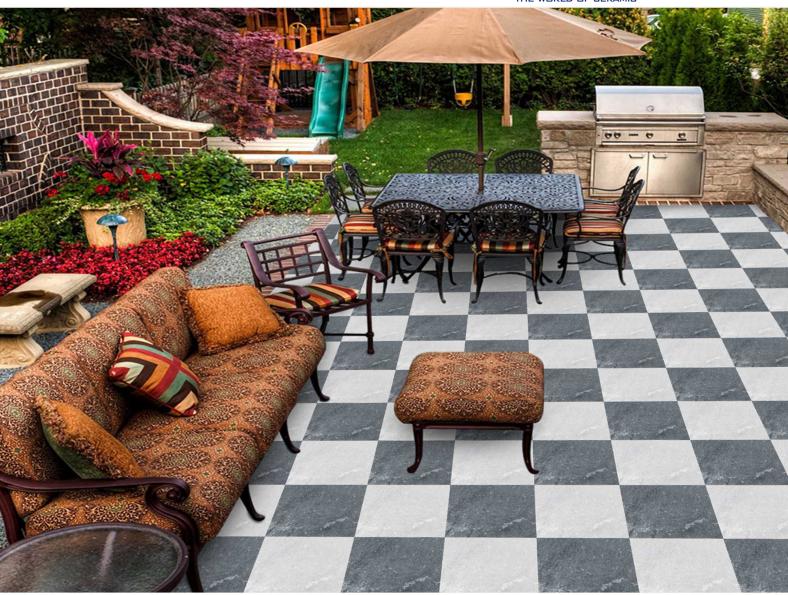




50205-D



50205-L

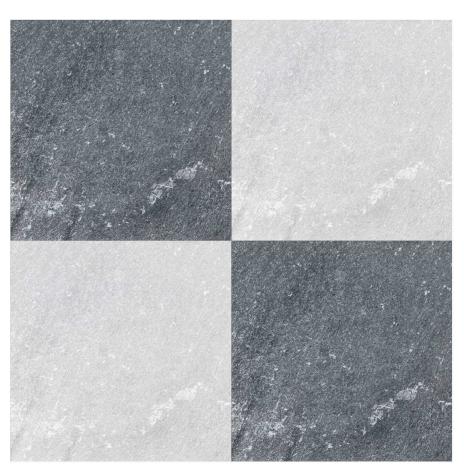















50208-D




50208-HL



50208-L




















50209-D




50409



50209-L

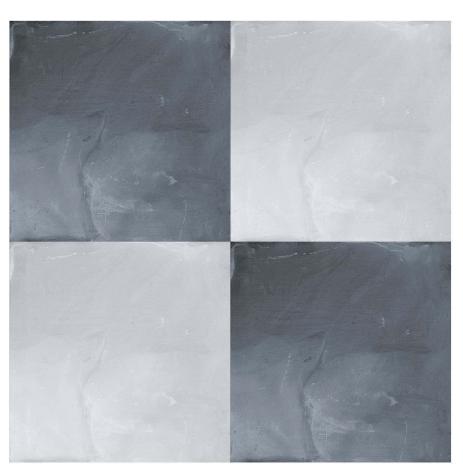
















50210-D




50210-HL



50210-L

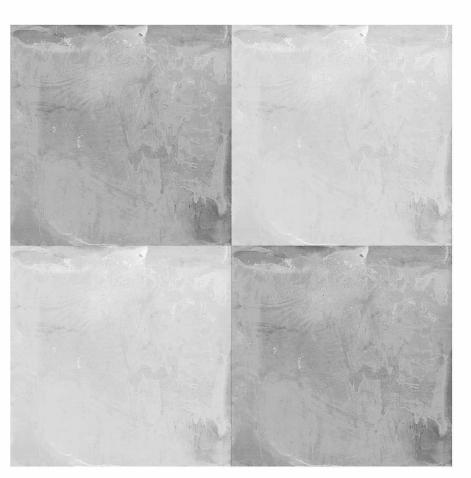












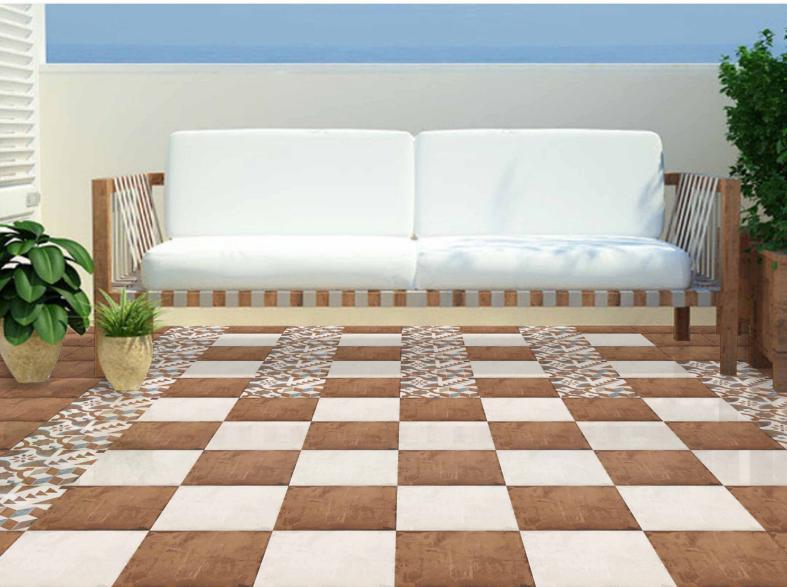



50211-D



50211-HL



50211-L











Technical Specification

Sr. No.	Property	VALUE	
1	Deviation in Length	<u>+</u> 0.5 %	
2	Deviation in Thickness	<u>+</u> 3 %	
3	Straightness of Sides	<u>+</u> 0.5 %	
4	Rectangularity	<u>+</u> 0.4 %	
5	Surface flatness	<u>+</u> 0.2 %	
6	Water absorption*	< 5 %	
7	Chemical Resistance	Resistance to all alkalies	
		(Except Hydro flouric acid	
		and its compounds)	
8	Thermal Shock	4 Cycles	

Size	Thickness	No. of Tiles/Box	Coverage Area (Approx)	Weight of Box (App.)
400x400mm	11.5mm(App.)	5 Pcs.	0.80 sq. mt.	18.500 Kgs.



Sl Survey No. 45, 8-A National Highway, Morbi-363642, (Guj.) India.

Email: specto.export@gmail.com Web: www.skidooceramic.com Mo. No: +91 99789 66119