


## Features: FLOOR TILES R RESISTANT TO STAINS ANTISLIP HIGHLY UV RESISTANT RESISTANT TO SCRATCHES THE WORLD OF CERAMIC 400 x 400 MM EASY TO CLEAN FROST RESISTANCE HAEVY DUTY PARKING TILES RESISTANCE TO HIGH TEMPERATURES RANDOM TILES HEAVY LOAD BEARING HIGH MECHANICAL RESISTANCE

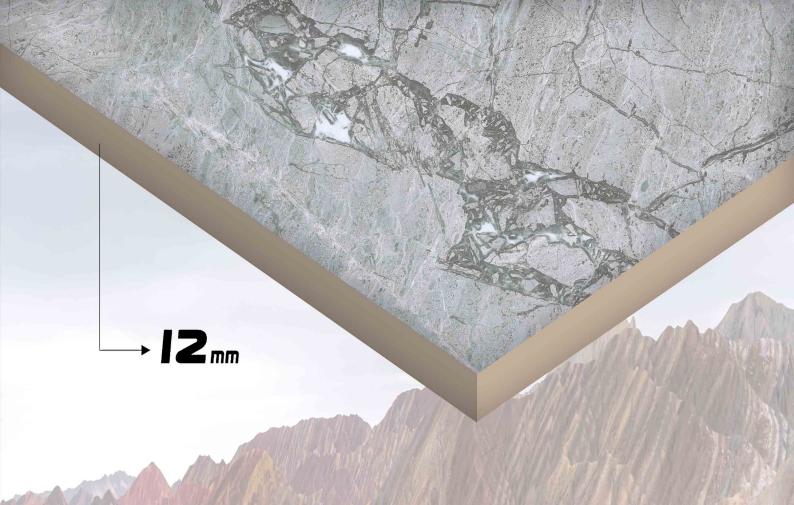

One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

**Skidoo** Heavy Duty vitrified tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are safely used in pedestrian traffic area, vehicular movement area, terraces, balconies, roof sunbathing areas, veranda, seaside, beach, swimming pools, side walk, metros, airports, train stations, industrial buildings, parking lots, underpasses, villa gardens, distribution companies, call centers, educational buildings etc...

## Application Areas:



WALKWAYS



ADJACENT AREAS



TERRACE



PARKING AREAS, TRANSITABLE AREAS



BEACH ESTABLISHMENTS



PUBLIC PARKS AND GARDENS






INDUSTRIAL AREAS










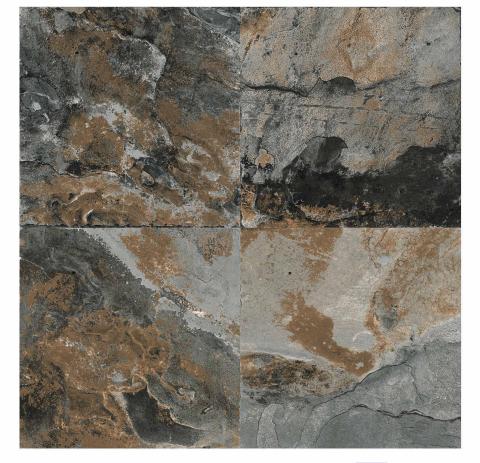












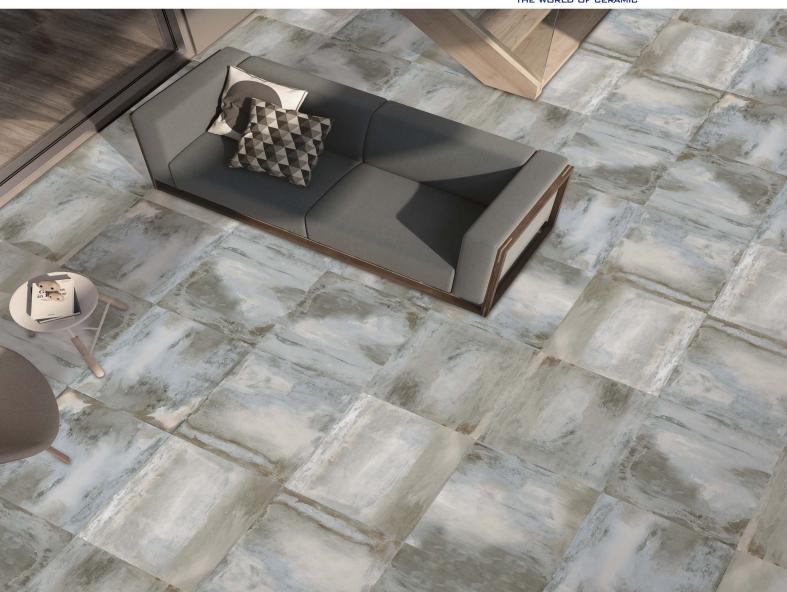
















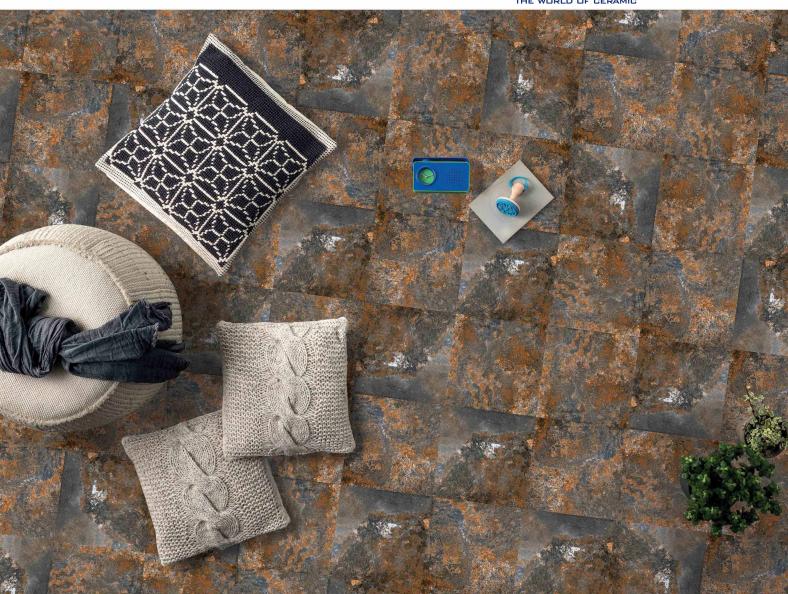
















































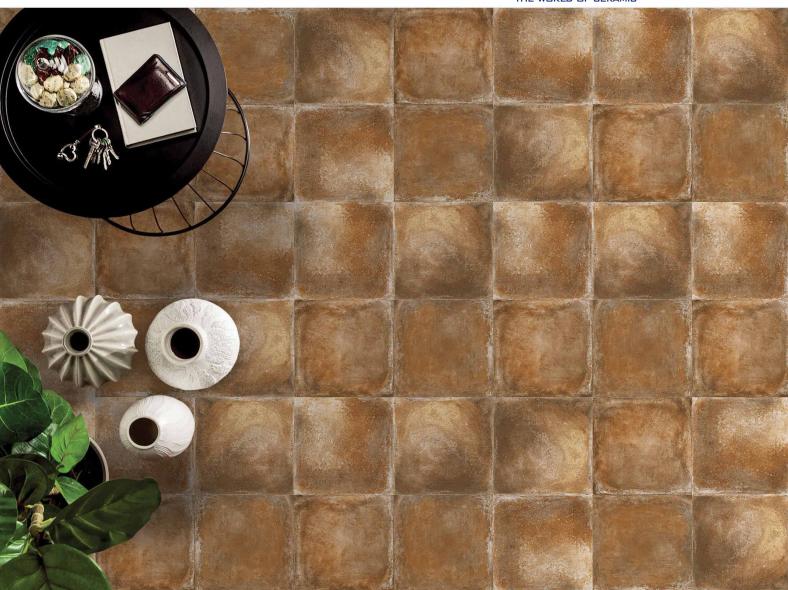




































(2 Face) 50010-D



(2 Face) 50010-L
























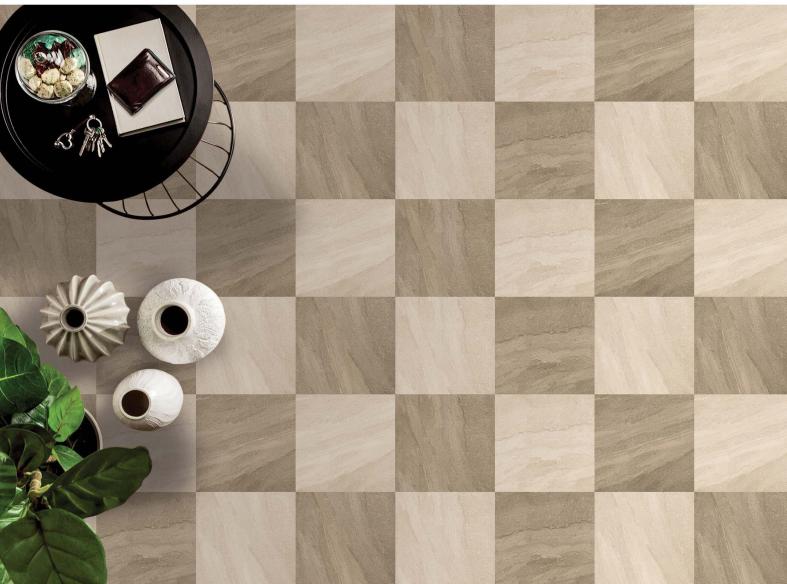
















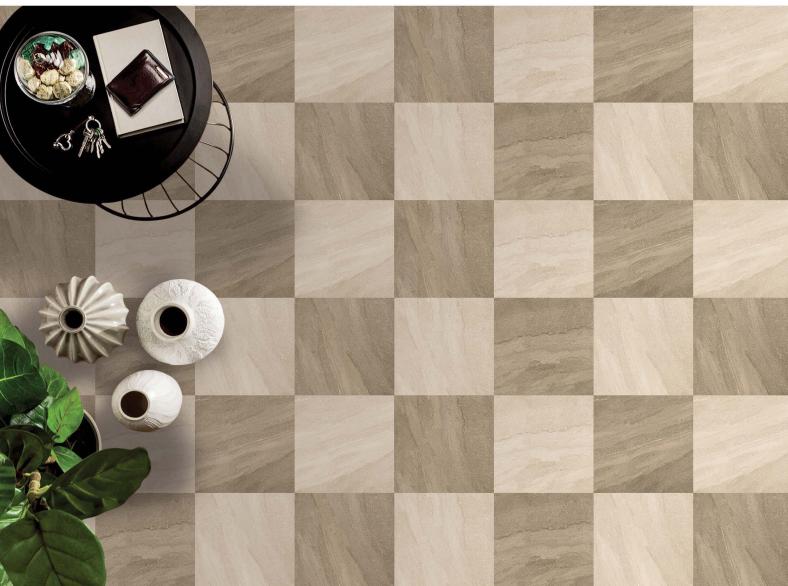
































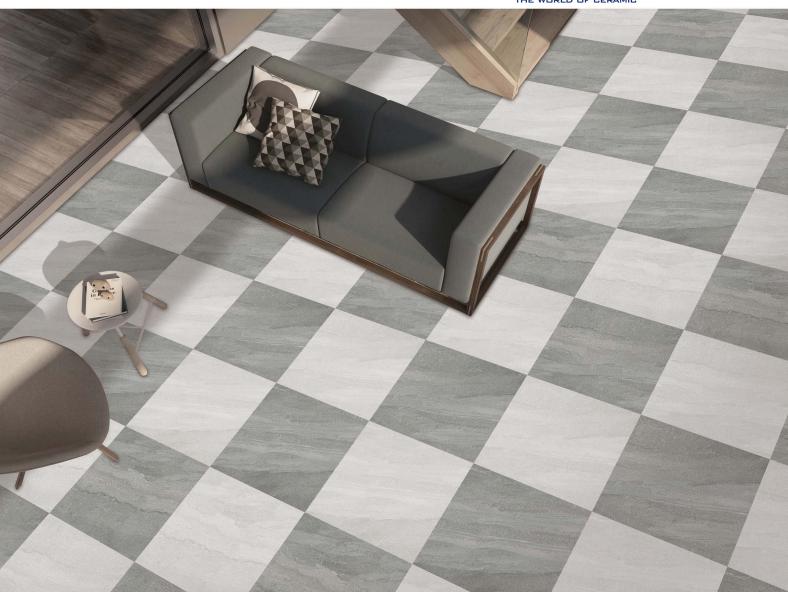
















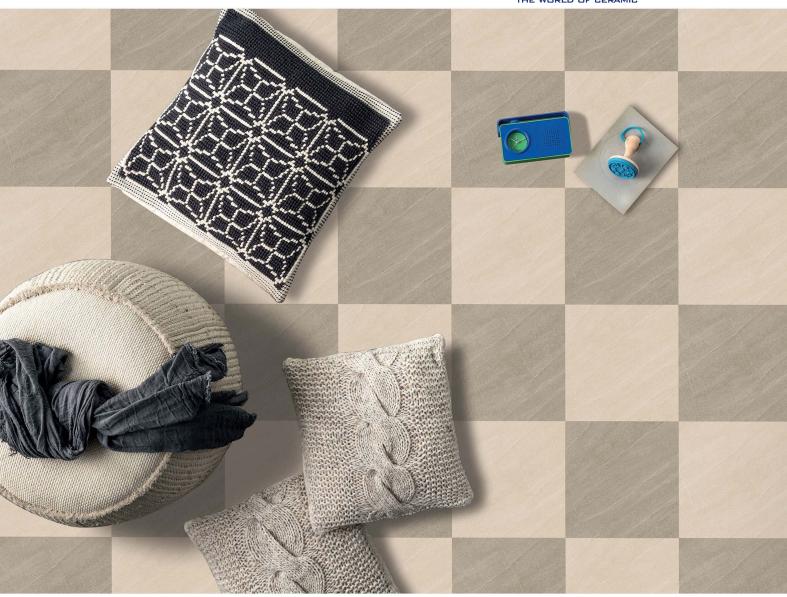










(2 Face) 50156

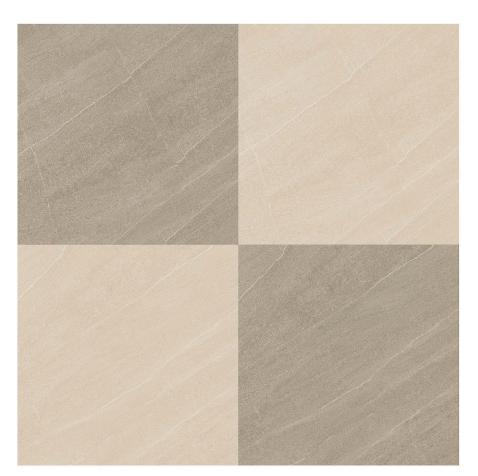





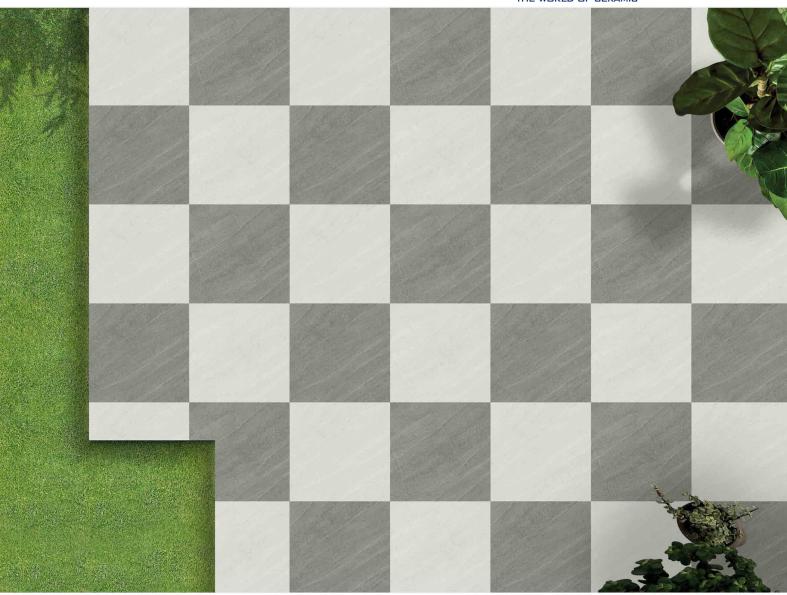




(2 Face) 50157



(2 Face) 50158





















## **Technical Specification**

Sr. No.	Property	VALUE	
1	Deviation in Length	<u>+</u> 0.5 %	
2	Deviation in Thickness	<u>+</u> 3 %	
3	Straightness of Sides	<u>+</u> 0.5 %	
4	Rectangularity	<u>+</u> 0.4 %	
5	Surface flatness	<u>+</u> 0.2 %	
6	Water absorption*	< 5 %	
7	Chemical Resistance	Resistance to all alkalies	
		(Except Hydro flouric acid	
		and its compounds)	
8	Thermal Shock	4 Cycles	

Size	Thickness	No. of Tiles/Box	Coverage Area (Approx)	Weight of Box (App.)
400x400mm	11.5mm(App.)	5 Pcs.	0.80 sq. mt.	18.500 Kgs.



Sl Survey No. 45, 8-A National Highway, Morbi-363642, (Guj.) India.

Email: specto.export@gmail.com Web: www.skidooceramic.com Mo. No: +91 99789 66119