


SKIDOO THE WORLD OF GERAMIC

TERSAZZO SERIES

An artistic expression for a stylish space.

400x400mm

HEAVY DUTY PARKING TILES

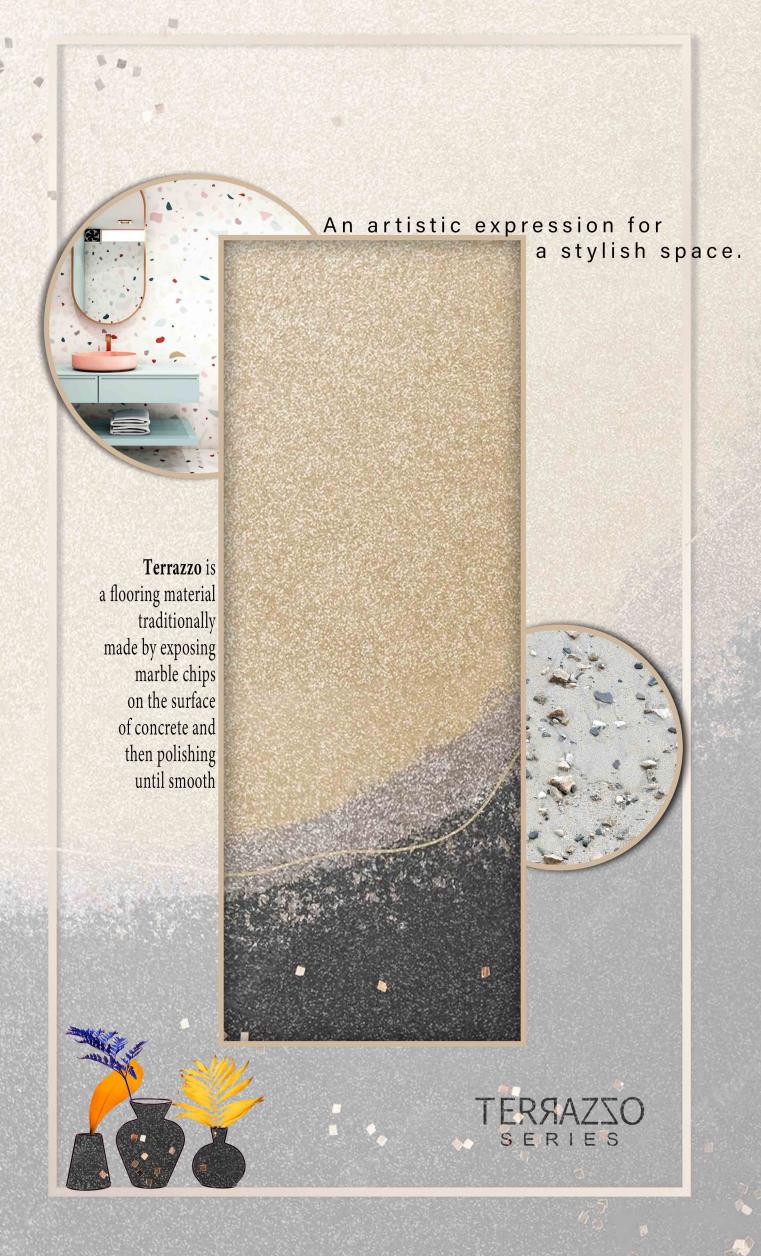

Features:



FLOOR TILES



RECTIFIED



RESISTANT TO STAINS



ANTISLIP



HIGHLY UV RESISTANT



RESISTANT TO SCRATCHES



EASY TO CLEAN



FROST RESISTANCE



RANDOM TILES



RESISTANCE TO HIGH TEMPERATURES



HEAVY LOAD BEARING



HIGH MECHANICAL RESISTANCE



SKIDOO THE WORLD OF GERAMIC

400 × 400 MM M

HAEVY DUTY VITRIFIED TILES





One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

Skidoo Heavy Duty vitrified tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are safely used in pedestrian traffic area, vehicular movement area, terraces, balconies, roof sunbathing areas, veranda, seaside, beach, swimming pools, side walk, metros, airports, train stations, industrial buildings, parking lots, underpasses, villa gardens, distribution companies, call centers, educational buildings etc...

Application Areas:



WALKWAYS



SWIMMING POOLS AN



TERRACE



PARKING AREAS, RANSITABLE AREAS



BEACH




PUBLIC PARKS AND GARDENS



STREET FURNISHINGS




INDUSTRIAL AREAS

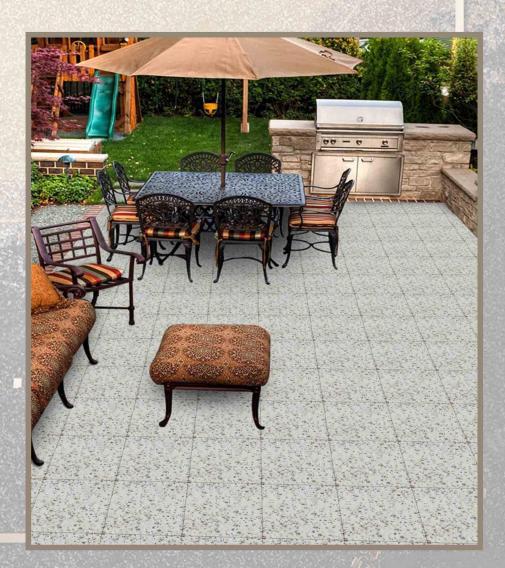



























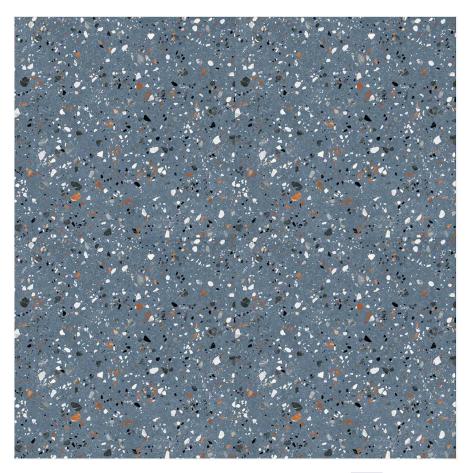





















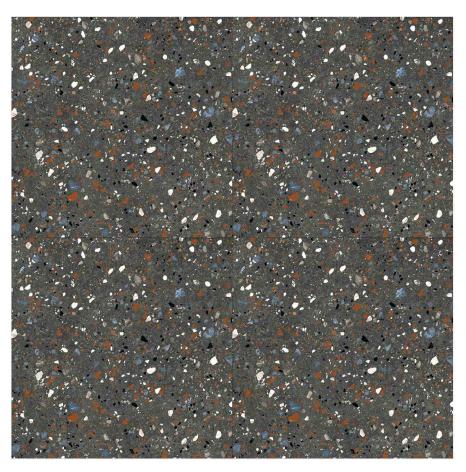







































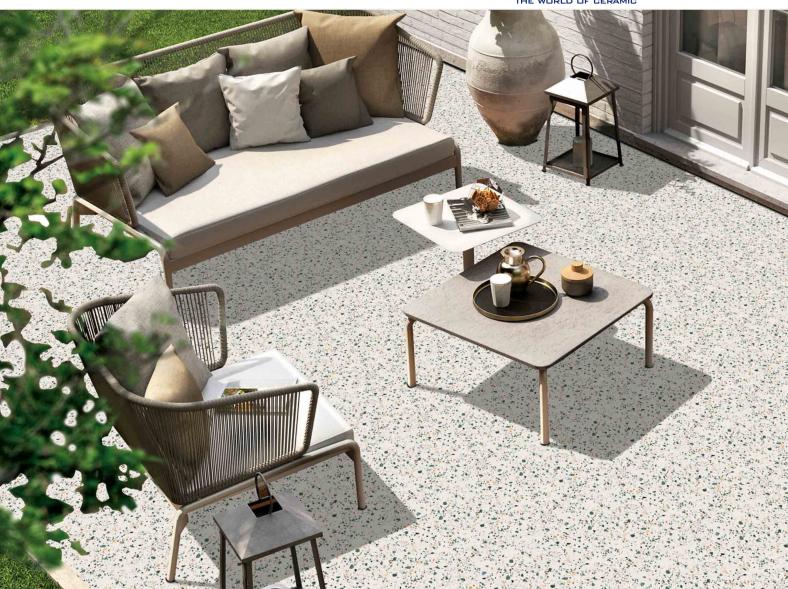



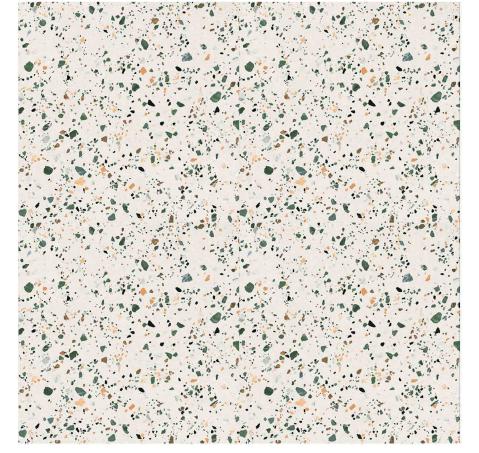












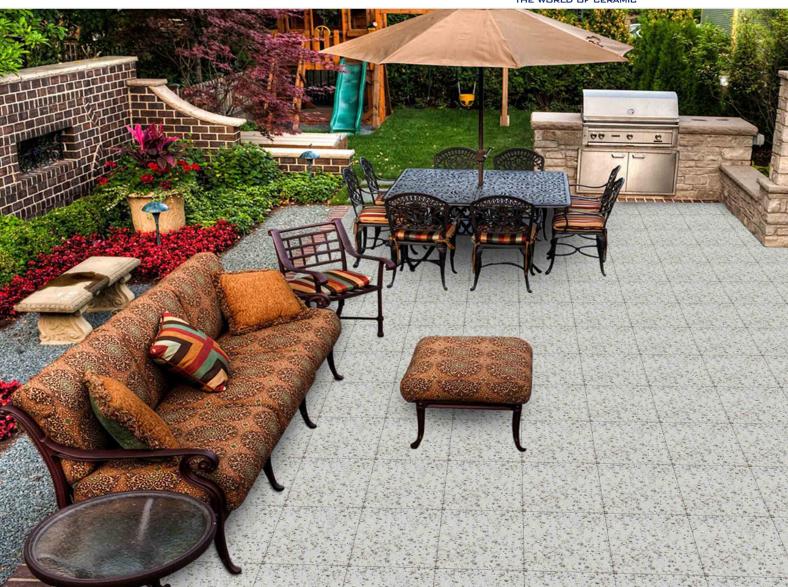































Technical Specification

Sr. No.	Property	VALUE	
1	Deviation in Length	<u>+</u> 0.5 %	
2	Deviation in Thickness	<u>+</u> 3 %	
3	Straightness of Sides	<u>+</u> 0.5 %	
4	Rectangularity	<u>+</u> 0.4 %	
5	Surface flatness	<u>+</u> 0.2 %	
6	Water absorption*	< 5 %	
7	Chemical Resistance	Resistance to all alkalies	
		(Except Hydro flouric acid	
		and its compounds)	
8	Thermal Shock	4 Cycles	

Size	Thickness	No. of Tiles/Box	Coverage Area (Approx)	Weight of Box (App.)
400x400mm	11.5mm(App.)	5 Pcs.	0.80 sq. mt.	18.500 Kgs.



Sl Survey No. 45, 8-A National Highway, Morbi-363642, (Guj.) India.

Email: specto.export@gmail.com Web: www.skidooceramic.com Mo. No: +91 99789 66119